Omics
+
Data mining

BCH394P/364C Systems Biology / Bioinformatics

Edward Marcotte, Univ of Texas at Austin

Omics

= large-scale study of all molecules in a biological sample/system (e.g. genomics, proteomics, metabolomics) to describe their composition, functions, dynamics, and interactions (e.g. functional genomics, connectomics, interactomics).

Omics
+
Data mining

= field that attempts to computationally discover patterns in large data sets

Omics
+
Data mining



We're going to first learn about clustering algorithms & classifiers

We're going to first learn about clustering algorithms & classifiers

Clustering = task of grouping a set of objects in such a way that objects in the same group (a **cluster**) are more similar (in some sense) to each other than to those in other groups (clusters).

Adapted from Wikipedia

We're going to first learn about clustering algorithms & classifiers

Classification = task of categorizing a new observation, on the basis of a training set of data with observations (or instances) whose categories are known

Adapted from Wikipedia

Let's motivate this with an important historical example:

Distinct types of diffuse large B-cell lymphoma identified by gene expression profiling

Ash A. Alizadeh[1,2], Michael B. Eisen[2,3,4], R. Eric Davis[5], Chi Ma[5], Izidore S. Lossos[6], Andreas Rosenwald[5], Jennifer C. Boldrick[1], Hajeer Sabet[5], Truc Tran[5], Xin Yu[5], John I. Powell[7], Liming Yang[7], Gerald E. Marti[8], Troy Moore[9], James Hudson Jr[9], Lisheng Lu[10], David B. Lewis[10], Robert Tibshirani[11], Gavin Sherlock[4], Wing C. Chan[12], Timothy C. Greiner[12], Dennis D. Weisenburger[12], James O. Armitage[13], Roger Warnke[14], Ronald Levy[6], Wyndham Wilson[15], Michael R. Grever[16], John C. Byrd[17], David Botstein[4], Patrick O. Brown[1,18] & Louis M. Staudt[5]

Nature 2000

"Diffuse large B-cell lymphoma (DLBCL), the most common subtype of non-Hodgkin's lymphoma … is one disease in which attempts to define subgroups on the basis of morphology have largely failed…"

"DLBCL … is clinically heterogeneous:
40% of patients respond well to current therapy and have prolonged survival, whereas the remainder succumb to the disease.

We proposed that this variability in natural history reflects unrecognized molecular heterogeneity in the tumours."

Nature 2000

Blast from the past: Profiling mRNA expression with DNA microarrays

DNA molecules are attached to a solid substrate, then…

…probed with a labeled (usually fluorescent) DNA sequence

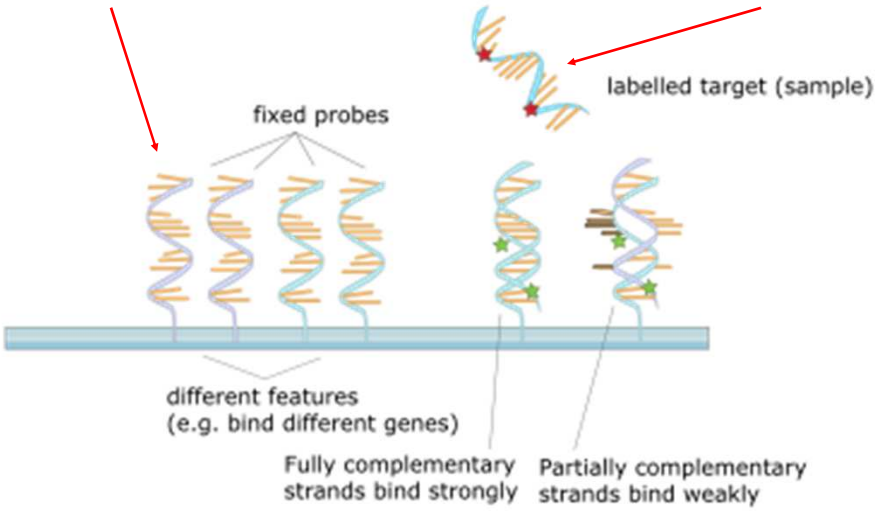

Wikipedia

Blast from the past: Profiling mRNA expression with DNA microarrays

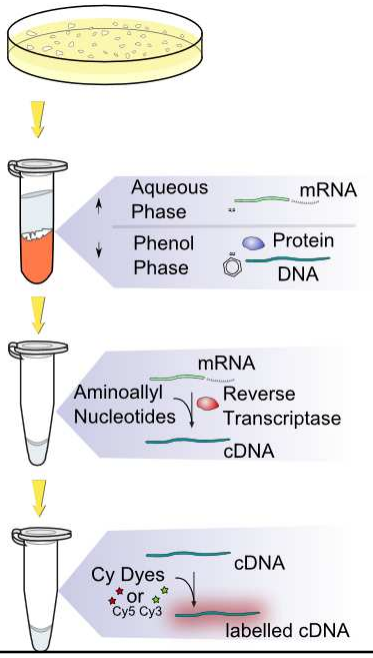

(FYI, we would generally now just sequence the cDNA)

Blast from the past: Profiling mRNA expression with DNA microarrays

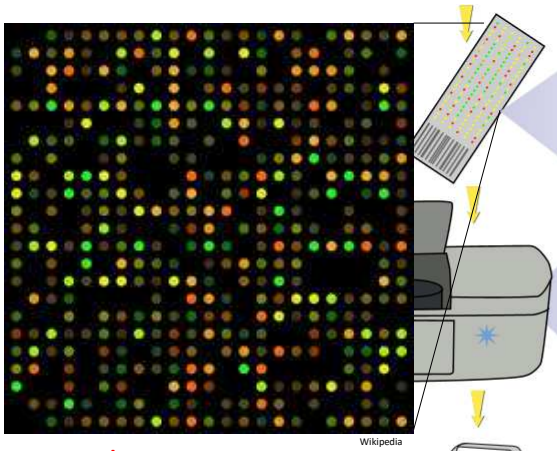

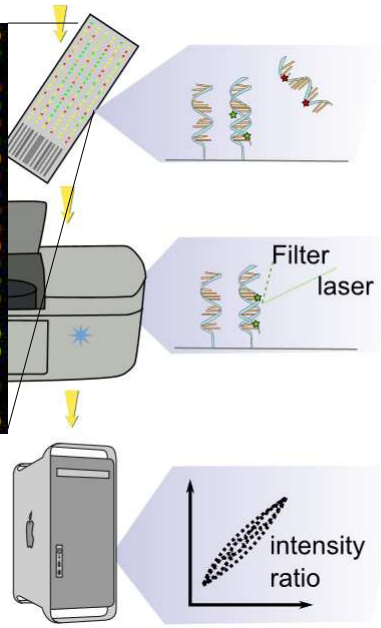

Note that some arrays are 1-color, some are 2. Why?

DNA microarrays are a great example of the "arc" of a technology over time, now almost completely displaced by sequencing

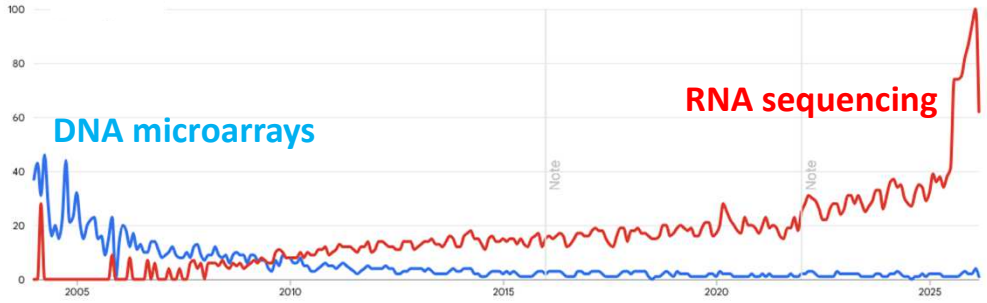

Worldwide Google trends, 2004-present

Back to diffuse large B-cell lymphoma…

96 patient biopsies
(normal and malignant lymphocyte samples)

↓

Extract mRNA from each sample

↓

Perform DNA microarray experiment on each to measure mRNA abundances (~1.8 million total gene expression measurements)

↓

Cluster samples by their expression patterns

Nature 2000

Red = high expression
Green = low

(yes, I know it's exactly backwards from what you might expect.)

Hierarchical clustering of the gene expression data

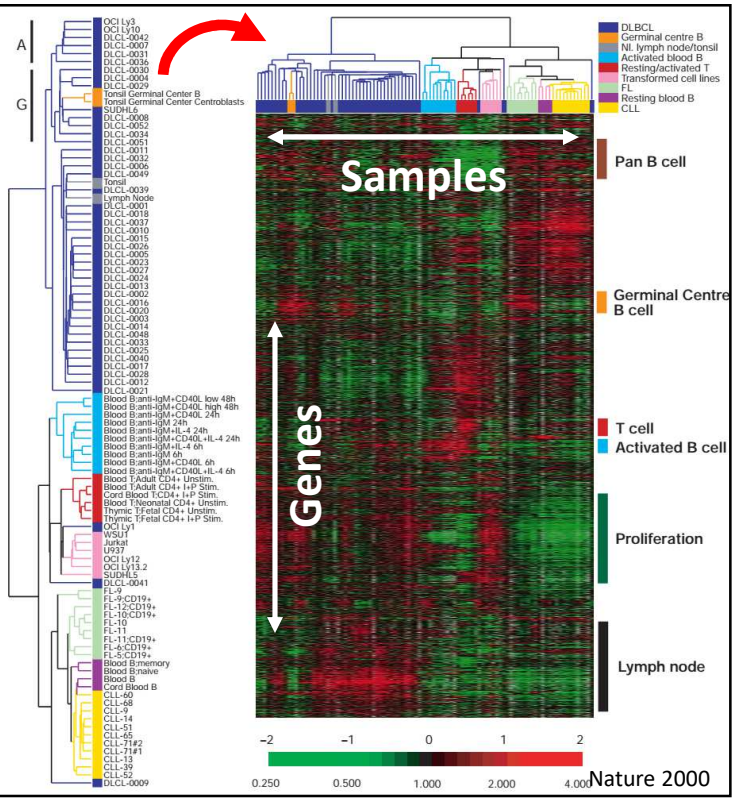

Nature 2000

Genes can be found whose expression is specific to germinal centre B cells, and different across DLBCL's

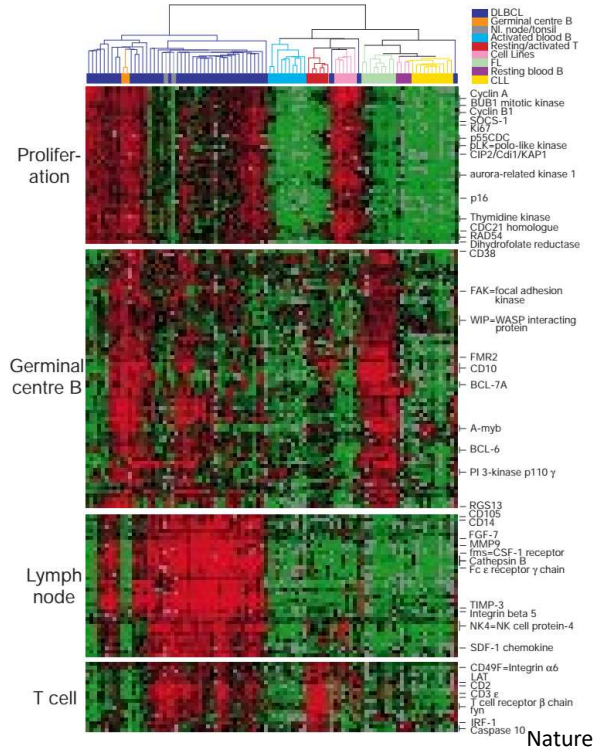

Nature 2000

We can break up the DLBCL's according the germinal B-cell specific gene expression:

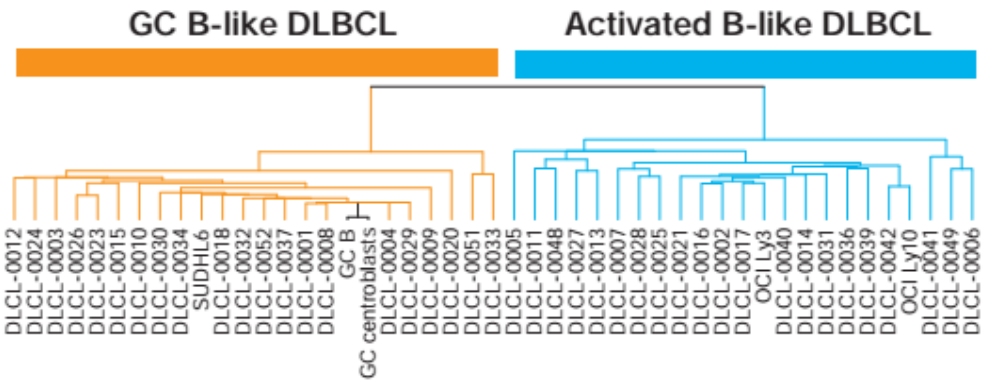

Nature 2000

What good is this? These molecular phenotypes predict clinical survival.

Kaplan-Meier plot of patient survival

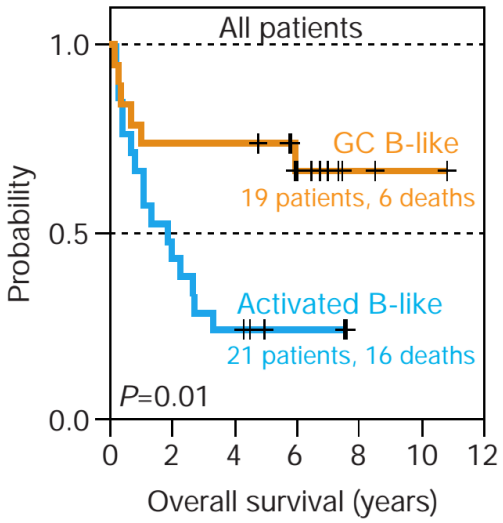

Nature 2000

What good is this? These molecular phenotypes predict clinical survival.

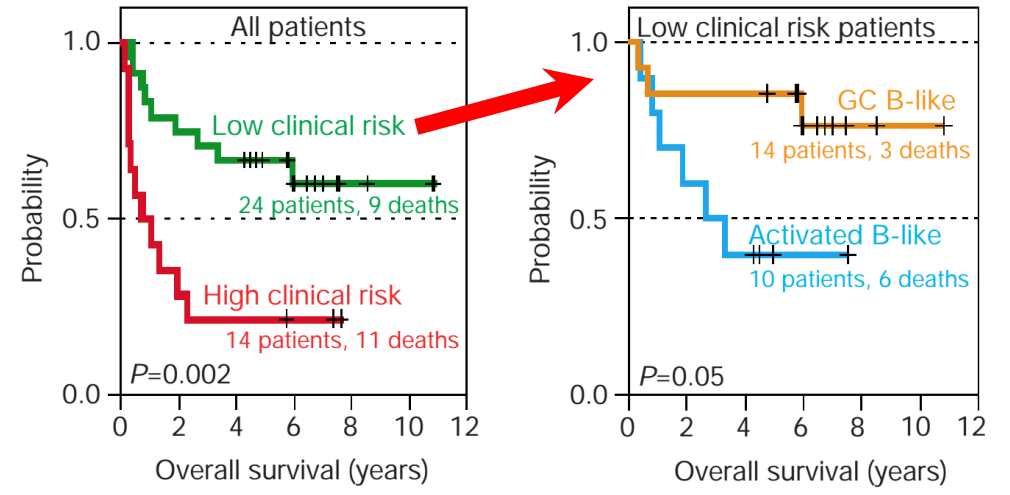

Grouping patients by clinical prognostic index

Regrouping low risk patients by gene expression

Nature 2000

Gene expression, and other molecular measurements, provide far deeper phenotypes for cells, tissues, and organisms than traditional measurements

These sorts of observations have now motivated tons of work using these approaches to diagnose specific forms of disease, as well as to discover functions of genes and many other applications

So, how does clustering work?

First, let's think about the data, e.g. as for gene expression.
From one sample, using DNA microarrays or RNA-seq, we get:

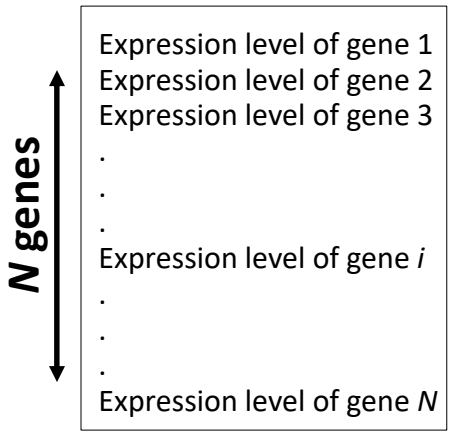

i.e., a vector of *N* numbers

For yeast, N ~ 6,000
For human, N ~ 22,000

So, how does clustering work?

Every additional sample adds another column, giving us a matrix of data:

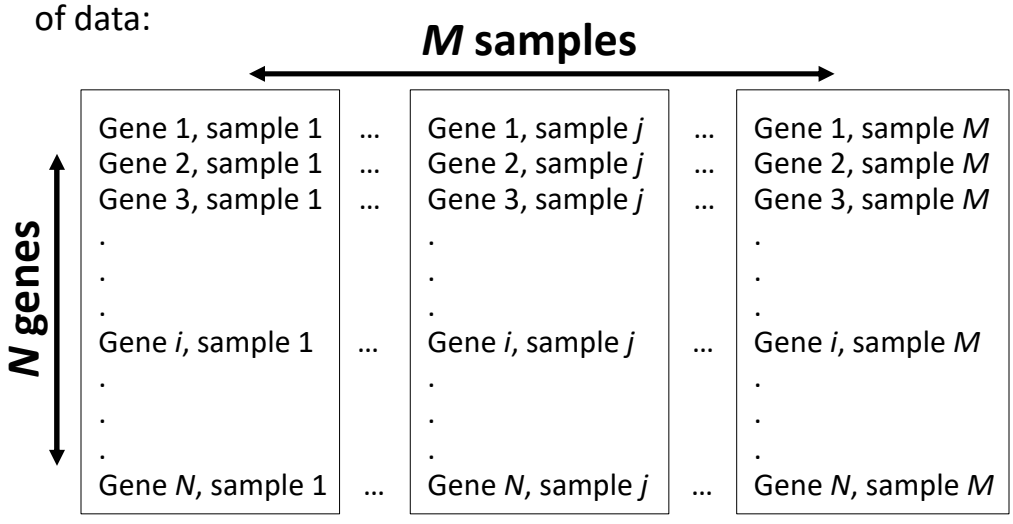

For yeast, N ~ 6,000
For human, N ~ 22,000

i.e., a matrix of *N* x *M* numbers

So, how does clustering work?

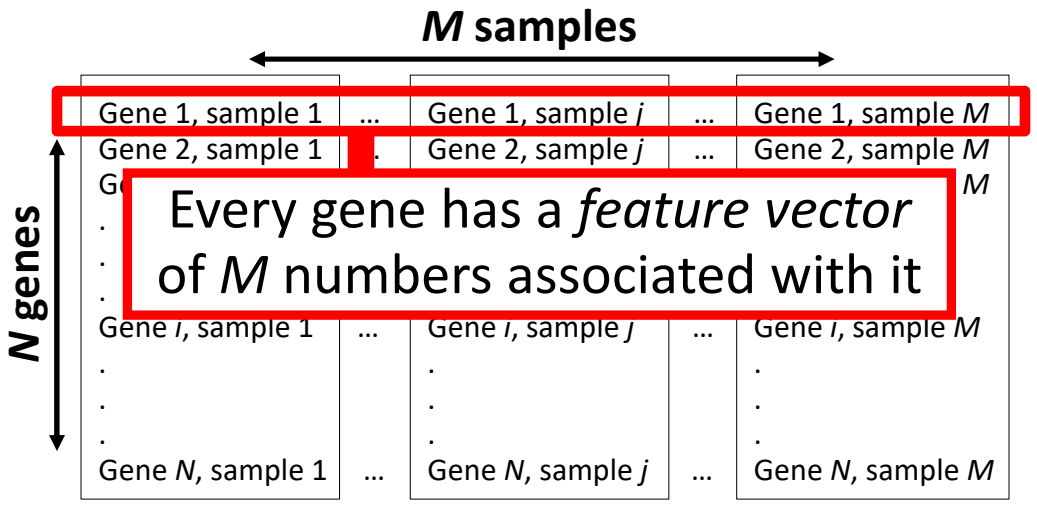

So, how does clustering work?

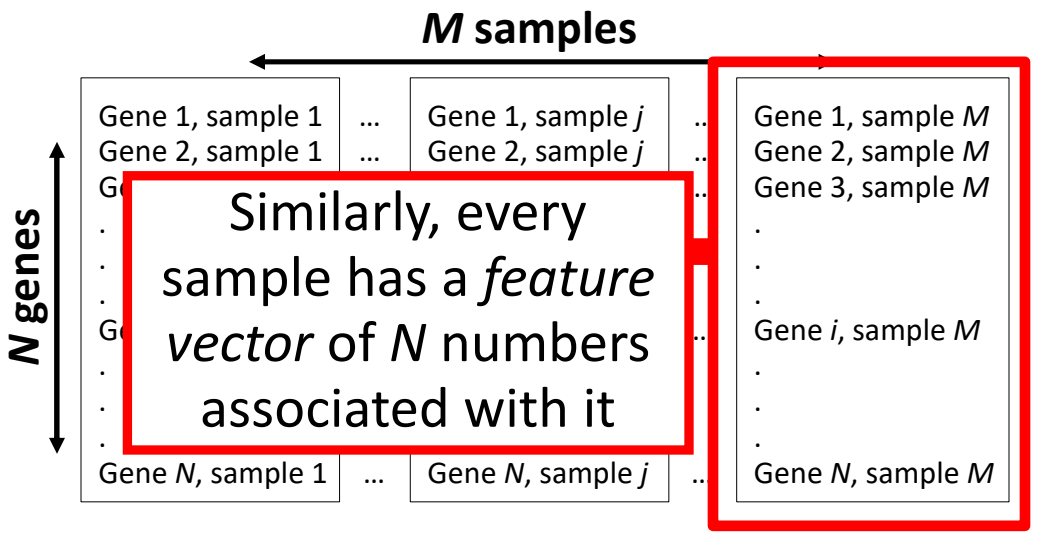

So, how does clustering work?

M samples

N genes

The first clustering method we'll learn about simply groups the objects (samples or genes) in a hierarchy by the similarity of their feature vectors.

Gene *N*, sample 1	…	Gene *N*, sample *j*	…	Gene *N*, sample *M*

A hierarchical clustering algorithm

Start with each object in its own cluster

Until there is only one cluster left, repeat:
- Among the current clusters, find the two most similar clusters
- Merge those two clusters into one

We can choose our measure of similarity and how we merge the clusters

Hierarchical clustering

Conceptually

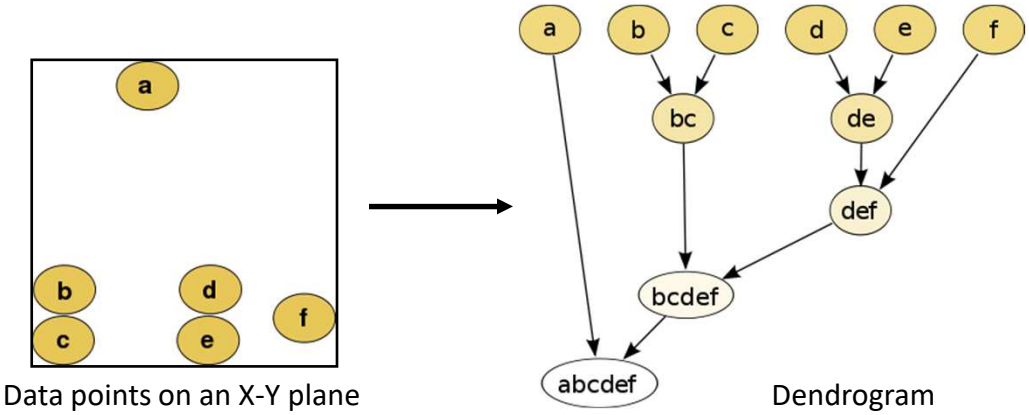

Data points on an X-Y plane

Dendrogram
(grouped by closeness)

Wikipedia

We'll need to measure the similarity between feature vectors. Here are a few (of many) common distance measures used in clustering.

Names	Formula
Euclidean distance	$\|a-b\|_2 = \sqrt{\sum_i (a_i - b_i)^2}$
Manhattan distance	$\|a-b\|_1 = \sum_i \|a_i - b_i\|$
cosine similarity	$\frac{a \cdot b}{\|a\|\|b\|}$

Wikipedia

A nice graphical view of them:

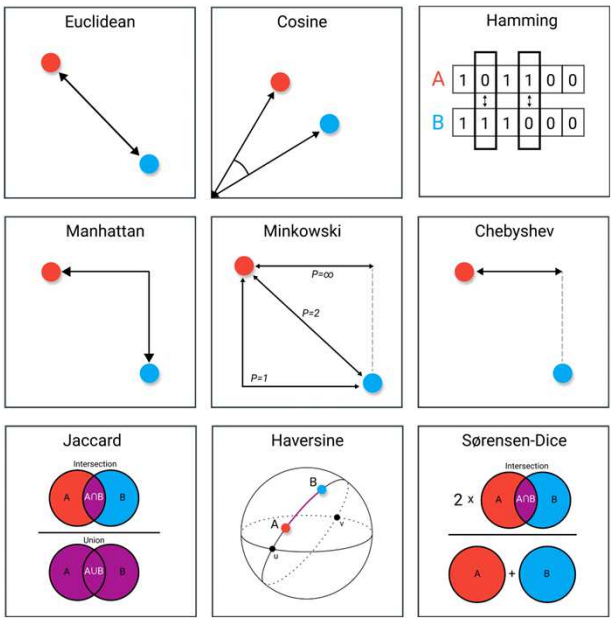

9 Distance Measures in Data Science: The advantages and pitfalls of common distance measures, by Maarten Grootendorst
https://towardsdatascience.com/9-distance-measures-in-data-science-918109d069fa

Back to the B cell lymphoma example

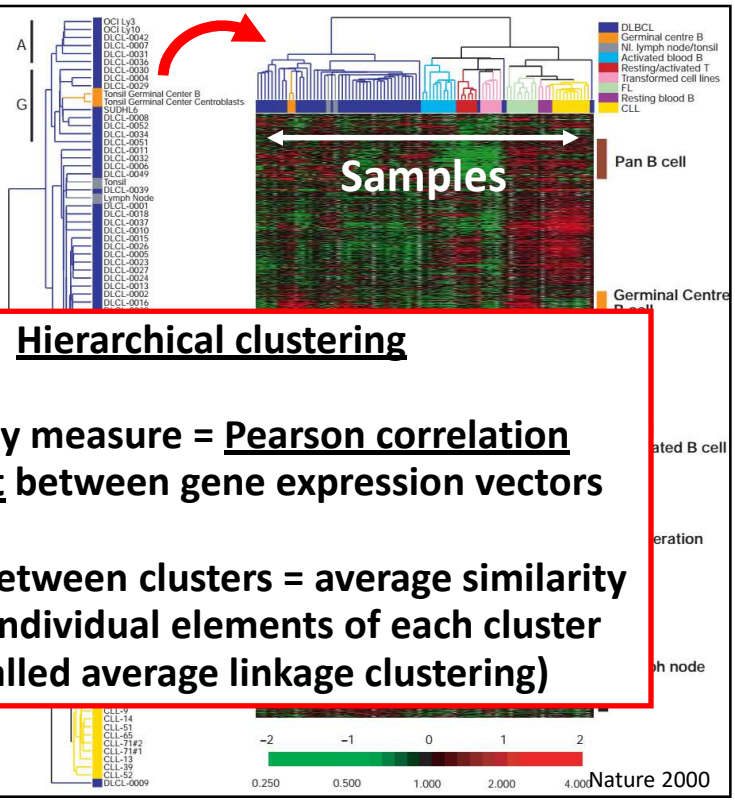

Hierarchical clustering

Similarity measure = Pearson correlation coefficient between gene expression vectors

Similarity between clusters = average similarity between individual elements of each cluster (also called average linkage clustering)

Nature 2000

K-means clustering is a common alternative clustering approach

mainly because it's easy and can be quite fast!

The basic algorithm:

1. Pick a number (*k*) of cluster centers
2. Assign each gene to its nearest cluster center
3. Move each cluster center to the mean of its assigned genes
4. Repeat steps 2 & 3 until convergence

See the K-means example posted on the web site

A 2-dimensional example

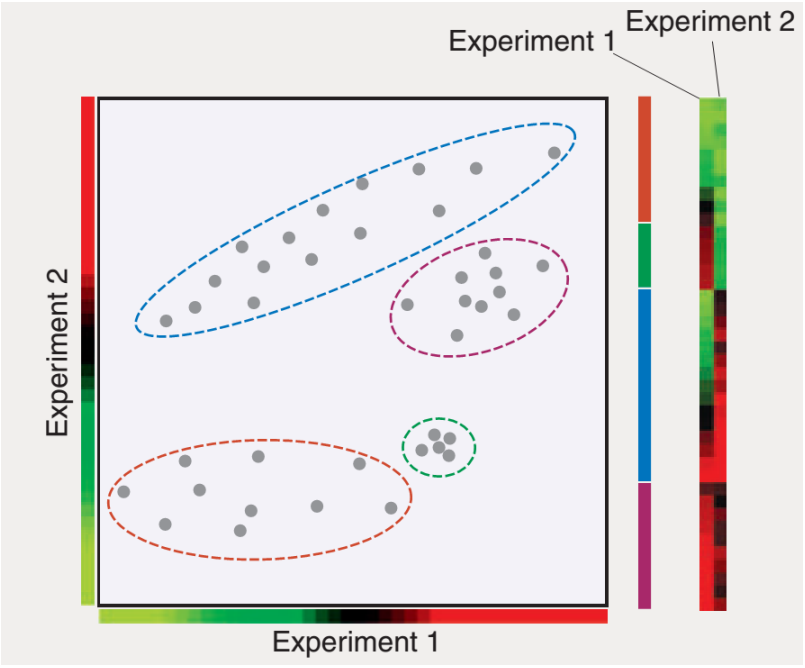

Nature Biotech 23(12):1499-1501 (2005)

A 2-dimensional example: hierarchical

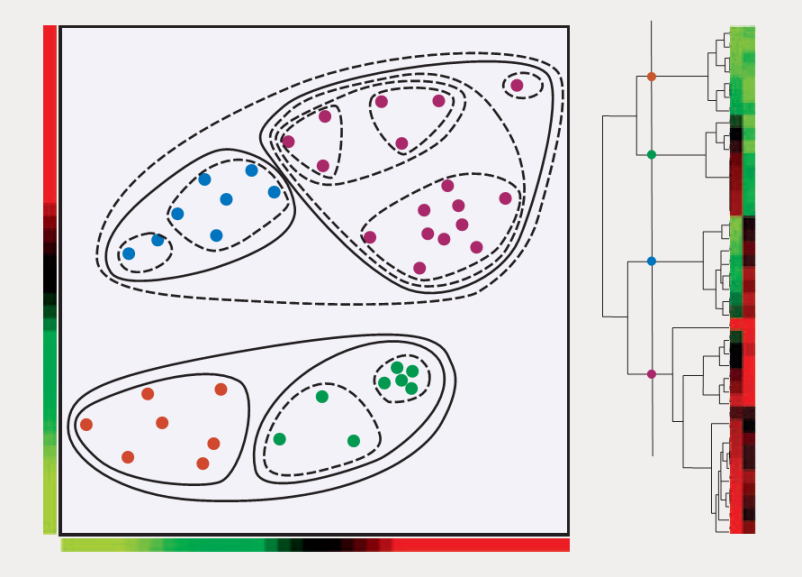

Nature Biotech 23(12):1499-1501 (2005)

A 2-dimensional example: *k*-means

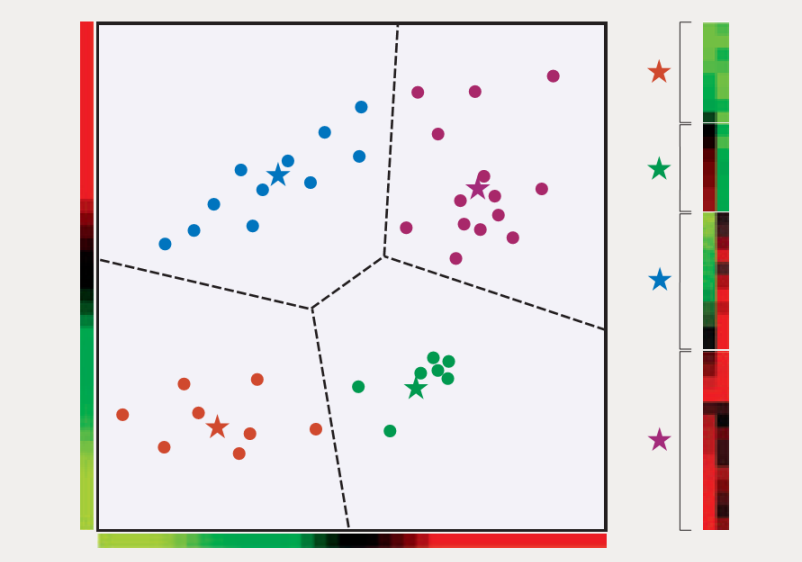

Nature Biotech 23(12):1499-1501 (2005)

A 2-dimensional example: *k*-means

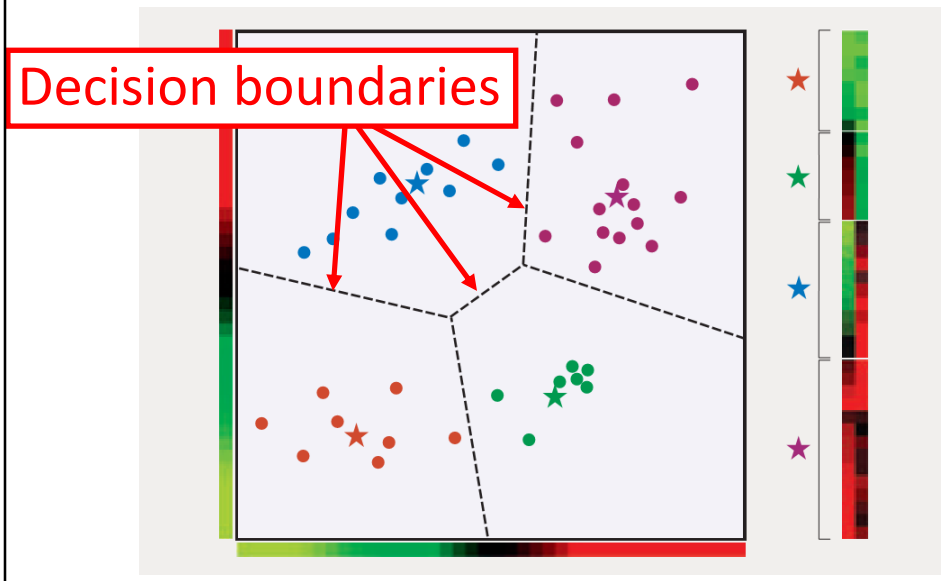

Nature Biotech 23(12):1499-1501 (2005)

Some features of K-means clustering

- Depending on how you seed the clusters, it may be stochastic. You may not get the same answer every time you run it.
- Every data point ends up in exactly 1 cluster (so-called *hard* clustering)
- Not necessarily obvious how to choose *k*
- Great example of something we've seen already: Expectation-Maximization (E-M) algorithms

EM algorithms alternate between assigning data to models (here, assigning points to clusters) and updating the models (calculating new centroids)

Some features of K-means clustering

- Depending on how you seed the clusters, it may be stochastic. You may not get the same answer every time you run it.
- Every data point ends up in exactly 1 cluster (so-called *hard* clustering)
- Not necessarily obvious how to choose *k*
- n:

Let's think about this aspect for a minute.
Why is this good or bad?
How could we change it?

EM a to
mo
updating the models (calculating new centroids)

k-means

The basic algorithm:

1. Pick a number (*k*) of cluster centers
2. Assign each gene to its nearest cluster center
3. Move each cluster center to the mean of its assigned genes
4. Repeat steps 2 & 3 until convergence

Fuzzy *k*-means

The basic algorithm:

1. Choose *k*. Randomly assign cluster centers.
2. Fractionally assign each gene to each cluster:

   e.g. occupancy $(g_i, m_j) = \frac{e^{-||g_i - m_j||^2}}{\sum_j e^{-||g_i - m_j||^2}}$

   Note: $||x||$ is just shorthand for the length of the vector *x*.
   g_i = gene i
   m_j = centroid of cluster j
3. For each cluster, calculate weighted mean of genes to update cluster centroid
4. Repeat steps 2 & 3 until convergence

The exponential "amplifies" large values, so the effect of this calculation is to weight the closest clusters disproportionately more heavily. Dividing by the sum normalizes the values to add up to 1, so that you get the fractions of weight assigned to each cluster.

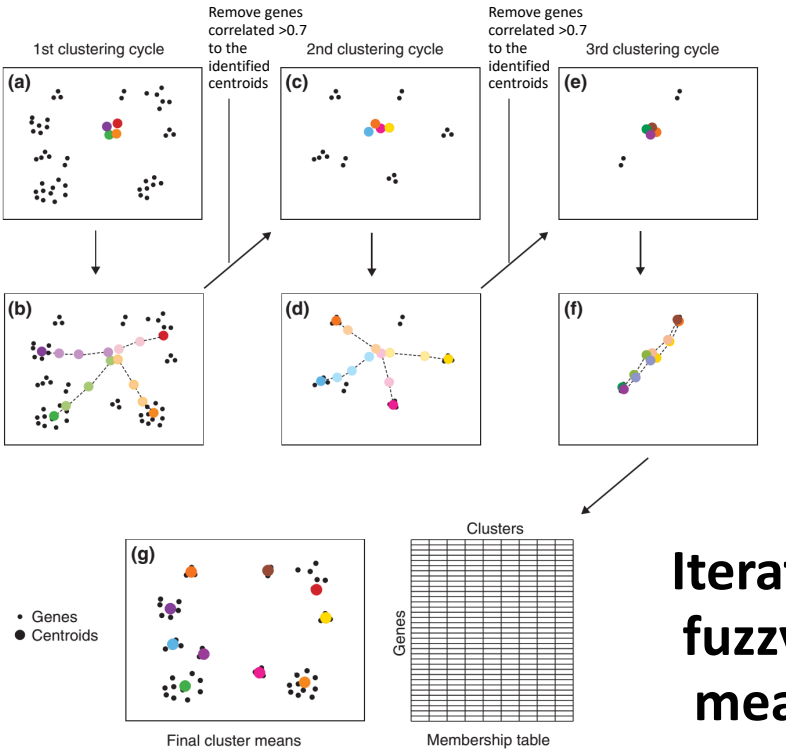

Iterating fuzzy *k*-means

Genome Biology 3(11):research0059.1–0059.22 (2002)

• Genes
● Centroids

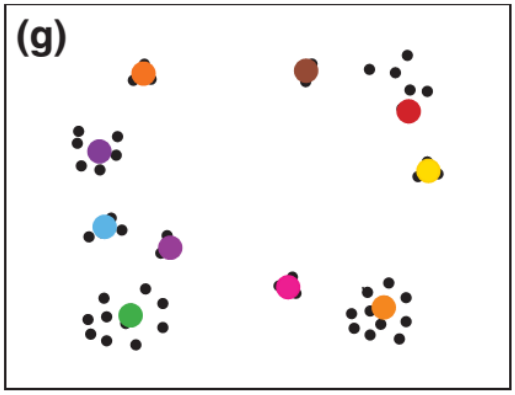

Final cluster means

Iterating fuzzy *k*-means

Genome Biology 3(11):research0059.1–0059.22 (2002)

A fun clustering strategy that builds on these ideas: Self-organizing maps (SOMs)

- Combination of clustering & visualization
- A type of artificial neural network
- Invented by Teuvo Kohonen, also called Kohonen maps



Dr. Eng., Emeritus Professor of the Academy of Finland; Academician

A fun clustering strategy that builds on these ideas: Self-organizing maps (SOMs)

SOMs have:
- your data (points in some high-dimensional space)
- a grid of nodes, each node also linked to a point someplace in data space

1. First, SOM nodes are arbitrarily positioned in data space. Then:
2. Choose a training data point. Find the node closest to that point.
3. Move its position closer to the training data point.
4. Move its grid neighbors closer too, to a lesser extent.

Repeat 2-4. After many iterations, the grid approximates the data distribution.

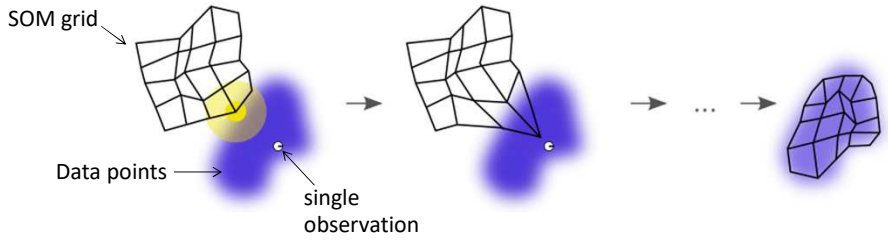

Wikipedia

An animated representation of training a 2D SOM

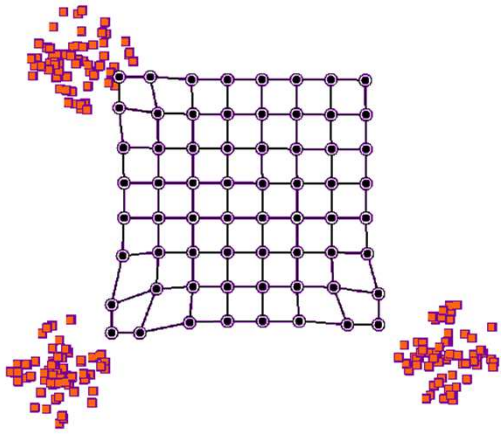

https://en.wikipedia.org/wiki/File:TrainSOM.gif

Here's an example using colors. Each color has an RGB vector. Take a bunch of random colors and organize them into a map of similar colors:

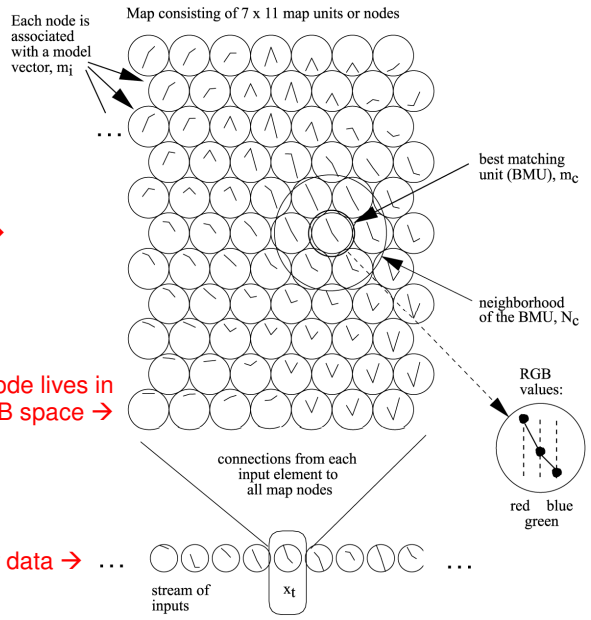

Here's the SOM →

Each SOM node lives in RGB space →

Here's the input color data →

Kybernetes 34(1/2): 40-53 (2005)

Iteratively test new colors, update the map using some rule

weight

Node neighborhood

$$m_i(t+1) = m_i(t) + \alpha(t)[x(t) - m_i(t)] \quad \text{for each} \quad i \in N_c(t),$$

Updated node vector

Starting node vector

Difference from data vector

The weight and node neighborhoods shrink with time (iterations)

Kybernetes 34(1/2): 40-53 (2005)

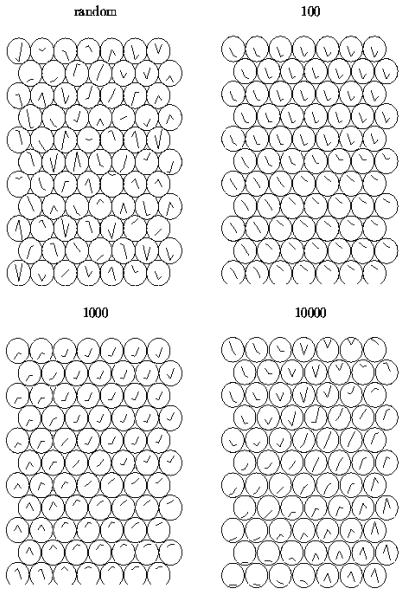

http://users.ics.aalto.fi/tho/thesis/

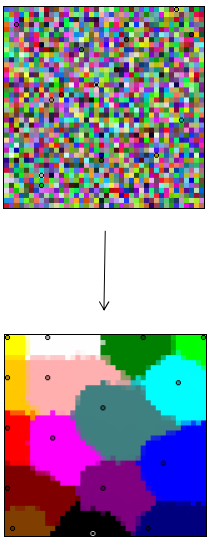

Over time, the map self-organizes to show clusters of like colors.

http://www.generation5.org/content/2004/kohonenApplications.asp

A SOM of U.S. Congress voting patterns

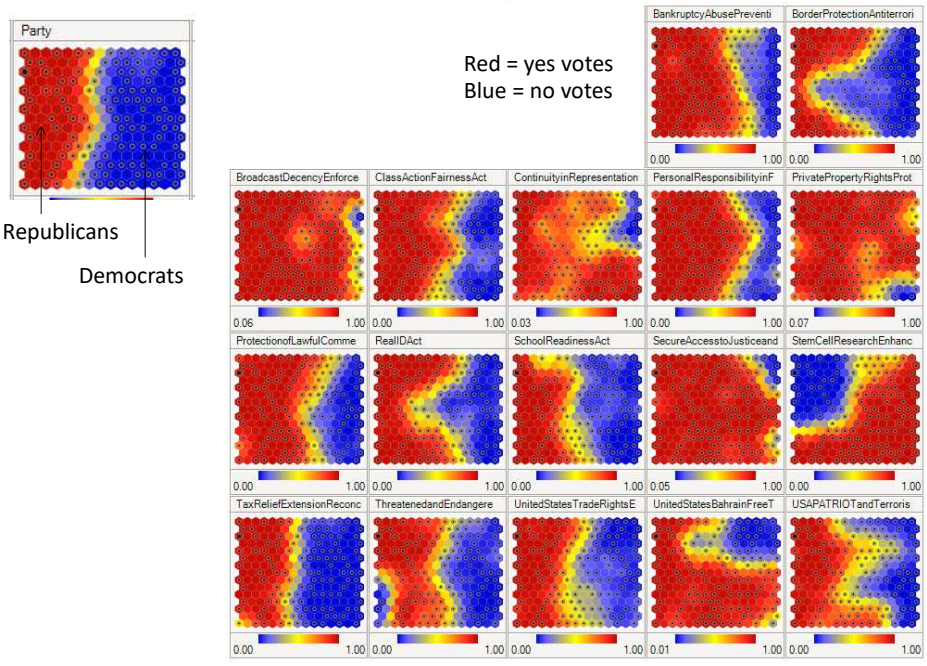

Wikipedia

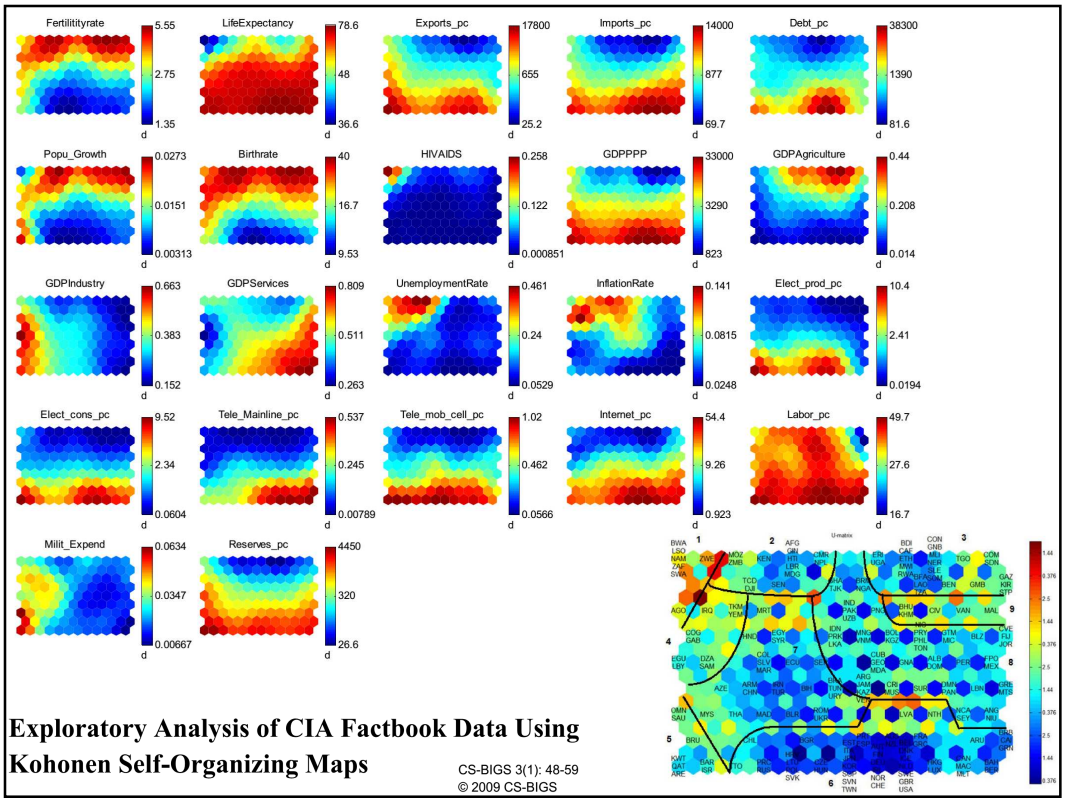

Exploratory Analysis of CIA Factbook Data Using Kohonen Self-Organizing Maps

CS-BIGS 3(1): 48-59
© 2009 CS-BIGS

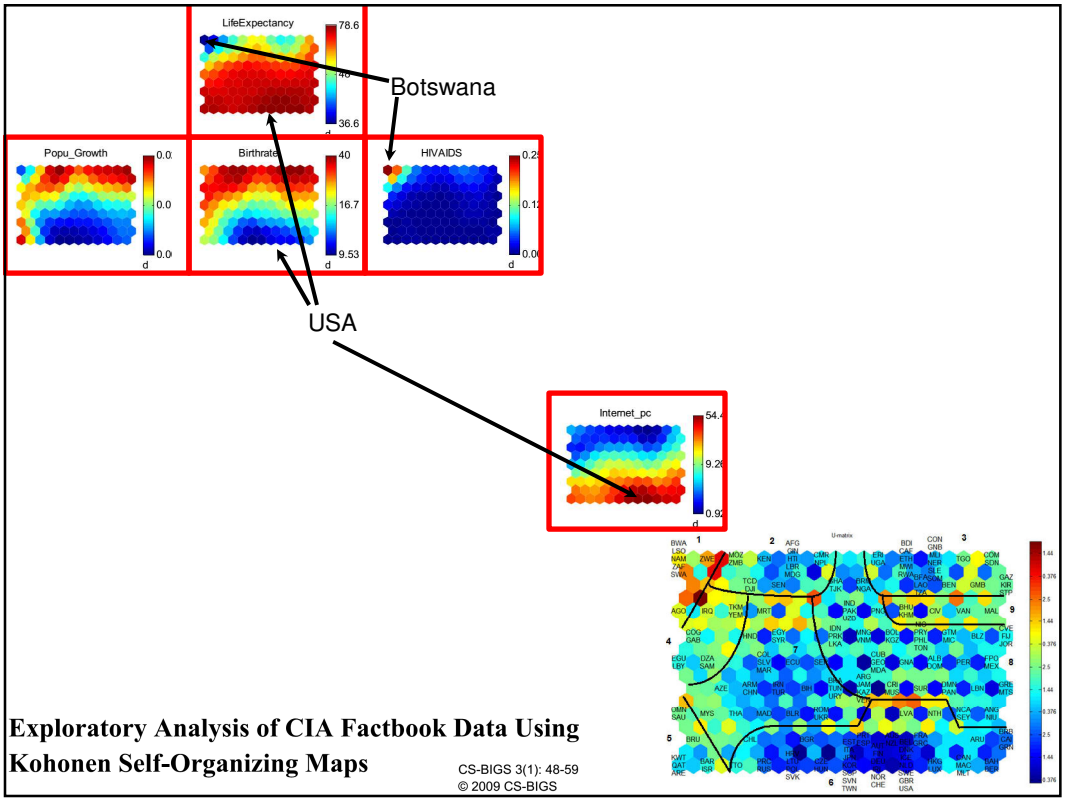

SOM of Wikipedia (from Wikipedia, naturally)

(data = wiki article word frequency vectors)

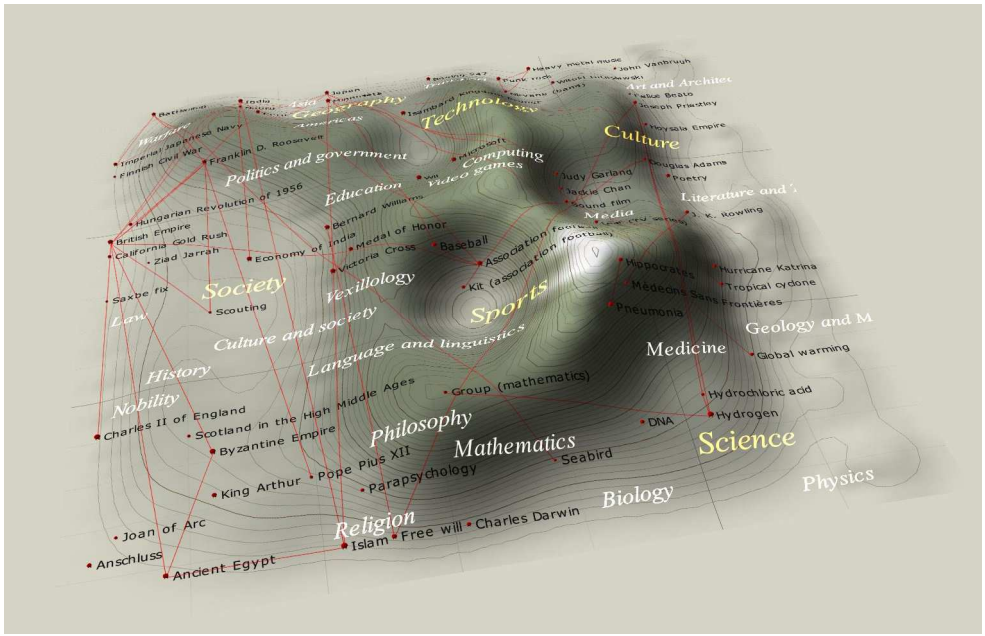

Wikipedia

SOMs can accommodate unusual data distributions

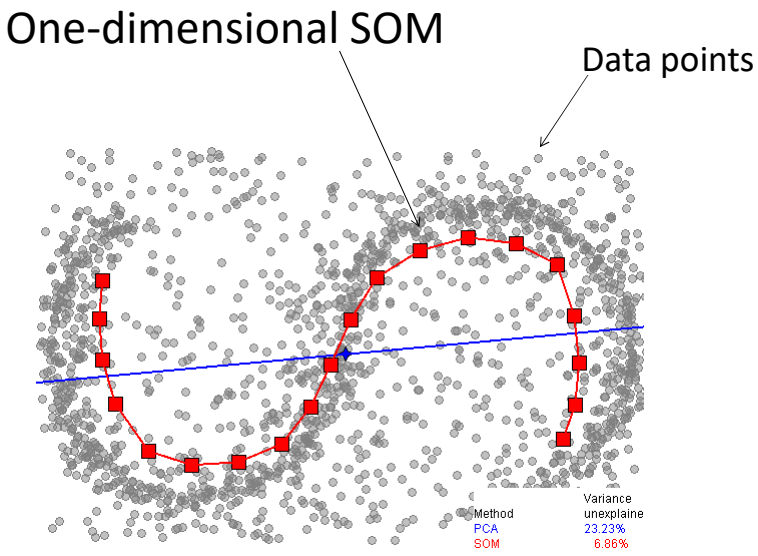

Wikipedia

Finally, **t-SNE** can sometimes be a useful way to visualize data in 2 or 3D
= *t-distributed stochastic neighbor embedding*

t-SNE tries to reproduce high-D *data neighborhoods* in a 2D or 3D picture by:

1. Defining a probability distribution over pairs of high-D objects such that "similar" objects have a high probability of being picked, whilst "dissimilar" objects have an extremely small probability of being picked

2. Defining a similar probability distribution over the points in the low- D map

3. Minimizing the Kullback–Leibler divergence between the two distributions by varying the locations of the points in the low-D map, i.e.

minimize this: $\sum_{i \neq j} p_{ij} \log \frac{p_{ij}}{q_{ij}}$

probability *i* and *j* are close in high-D space

probability *i* and *j* are close in low-D space

Sum over all pairs of points

van der Maaten & Hinton, Visualizing High-Dimensional Data Using t-SNE. *Journal of Machine Learning Research* **9**: 2579–2605 (Nov 2008)

Separating cells into cell types by t-SNE

- healthy human bone marrow, stained with 13 markers and measured by mass cytometry, visualized with viSNE

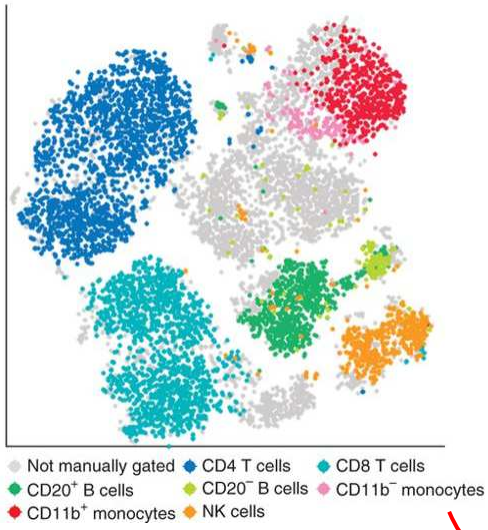

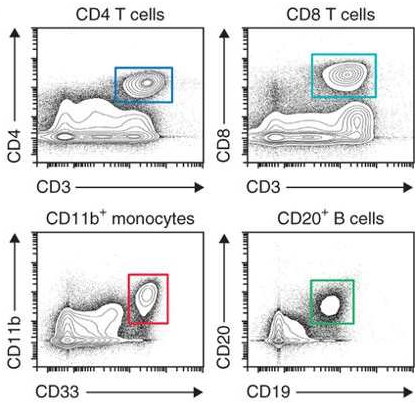

The colors correspond to how an expert would "gate" the cytometer

Amir *et al.*, *Nature Biotechnology* **31:**545–552 (2013)

You can compute your own t-SNE embeddings using the online tools at:

http://projector.tensorflow.org/

There are also some great examples at:

http://distill.pub/2016/misread-tsne/

There are only a couple of parameters you can (and should) tweak, mainly **perplexity**, which effectively captures the number of neighbors (often 5 to 50)

BUT…

tSNE & the related technique UMAP lend themselves to misinterpretation, so *use caution in interpreting them!*

I recommend that you read "The specious art of single-cell genomics", by Tara Chari & Lior Pachter
https://journals.plos.org/ploscompbiol/article?id=10.1371/journal.pcbi.1011288

"In biology, single-cell expression studies almost always begin with reduction to two or three dimensions to produce 'all-in-one' visuals of the data that are amenable to the human eye, and these are subsequently used for qualitative and quantitative analysis of cell relationships. However, there is little theoretical support for this practice."

"To illustrate the indeterminate nature of 2D UMAP and t-SNE embeddings, we developed an autoencoder framework to fit cells from any dataset to an arbitrary 2D shape, while preserving … cell-to-cell distances to an extent not much different than UMAP or t-SNE. Though it is unlikely scientists would present data in such forms, … they are quantitatively similar in … fidelity to the data … [as] UMAP or t-SNE embeddings."

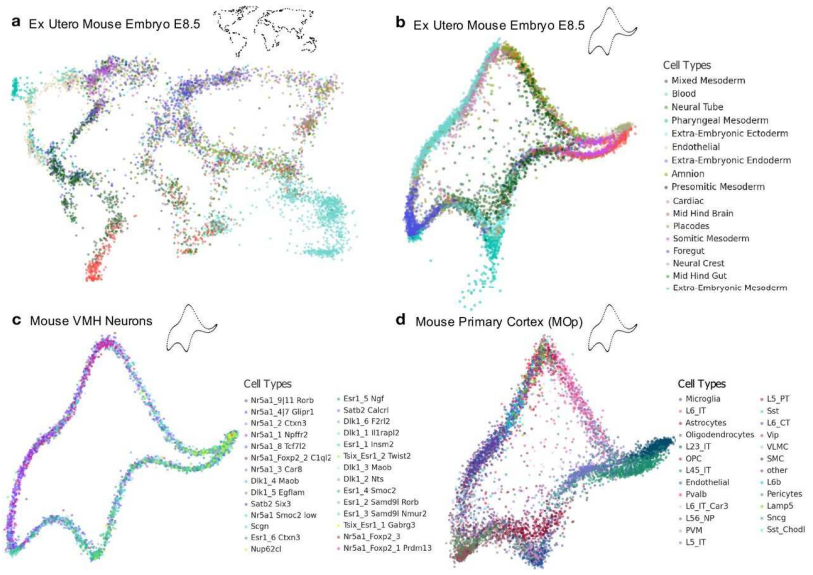

https://www.biorxiv.org/content/10.1101/2021.08.25.457696v1.full

Some take aways

Data clustering and visualization are great to build some intuition for your data & ask questions like:
Are my data obviously clustered?
What's that set of outliers over there? **…etc…**

But! High-dimensional data usually can't be perfectly represented in just 2- or 3-dimensions.

So, remember that most data visualization approaches (including SOMs, tSNE, and UMAP) distort the true data relationships.
Try more than one approach and use caution in interpreting.